

STRUCTURAL DESIGN OF INTERLOCKING CONCRETE PAVEMENTS IN NORTH AMERICA

Gonzalo R. Rada, Ph. D.

PCS/Law Engineering, Beltsville, Maryland, USA

David R. Smith

Concrete Paver Institute, Herndon, Virginia, USA

John S. Miller, P.E.

PCS/Law Engineering, Beltsville, Maryland, USA

Matthew W. Witczak, Ph. D.

University of Maryland, College Park, Maryland, USA

Several methods for designing interlocking concrete pavements for roads and streets are presently available. All recognize the need to consider the subgrade soil, paving materials, environment and anticipated traffic. There are number of limitations associated with each, including lack of pavement performance prediction capabilities, and inability to specify desired pavement failure and reliability level. This paper presents a method to overcome these limitations. The AASHTO flexible pavement design methodology was used as the fundamental framework for developing this procedure. Several modifications allow for the characterization of interlocking concrete pavers as well as for various levels of engineering analysis depending on the availability of information. The proposed design methodology is demonstrated through an example.

INTRODUCTION

Although the use of concrete pavers in pavement design and construction is a rather new development, several structural design methods are presently available (5, 7 to 9, 16 to 18, 20, 23, 26). All of these methods recognize the need to consider the subgrade soil, characteristics of the pavement materials, environmental effects and the anticipated traffic over the design period. While they provide an excellent reference, limitations of these procedures include: (1) inadequate characterization of the subgrade soil and pavement materials, especially concrete pavers; (2) lack of pavement performance prediction capabilities; and, (3) inability to specify desired pavement failure and reliability levels.

In view of this, a study was undertaken to develop a more comprehensive design procedure for roads and streets. The analysis framework found within the newly revised (1986) American Association of State Highway and Transportation Officials (AASHTO) flexible pavement design method (1) was selected as the basis for this effort because: (1) of its broad experience base and general acceptance in North America, (2) it does not have the limitations noted above, and more importantly, (3) the load distribution and failure modes of a interlocking concrete pavement are very similar to those of any other flexible pavement system; i.e., the main failure mode is increasing roughness due to repetitive shear deformations.

Modifications to the AASHTO method were necessary for application to the design of interlocking concrete pavements. In particular, a strength characterization model for concrete pavers was developed. Also, alternate procedures for characterizing the environment, traffic, subgrade and material strengths were developed to allow for various levels of engineering analysis, depending on the information available to the designer. The reader should also note that the AASHTO equations in this paper are

based on imperial units. Conversion of the equations to metric is necessary if the reader wishes to make calculations with S.I. units.

AASHTO DESIGN METHODOLOGY

The design procedure recommended by AASHTO is based upon the results of the extensive AASHTO Road Test conducted in the late 1950's and early 1960's. This road test introduced the concept of functional failure of a roadway. Simply stated, the function of any road is to safely and smoothly carry traffic from one point to another. When these conditions are no longer met, functional failure has occurred.

In order to quantify such a functional description, two additional concepts were introduced: Serviceability and Performance. Serviceability is a measure of how well a road is serving its intended function, on the scale of 0 to 5 (5 being excellent), at a particular point in time. Performance, which is a time related function of serviceability, is the ability of a pavement to satisfactorily serve traffic over a period of time.

Using these concepts and incorporating the effects of the environment, traffic, subgrade soil and construction materials, pavement design formulas were developed. These formulas have been modified over the years to incorporate new advances in pavement technology. The most recent modifications were made in 1986, when the new AASHTO Guide was published. In this guide, the basic initial design equation for use with flexible pavements is given by:

$$\log_{10}(EALs * F_R) = 9.36 * \log_{10}(SN+1) - 0.20 + \log_{10} \left(\frac{(p_o - p_t) / (p_o - 1.5)}{0.4 + \frac{1094}{(SN + 1)^{5.19}}} \right) \quad (1)$$

$$+ (2.32 * \log_{10}(M_R) - 8.07)$$

where EALs = cumulative number of 18-kip (80 kN) equivalent single axle load repetitions over the specified design life; F_R = reliability design factor; SN = structural number of the pavement; p_o = initial pavement serviceability; p_t = terminal pavement serviceability; and, M_r = resilient modulus of the subgrade soil in pounds per square inch.

Given the subgrade resilient modulus, the anticipated traffic, desired reliability level, and a specified initial and terminal serviceability level, the above equation can be used to determine the required structural number (a parameter characterizing the combination of layer thickness and material type).

DESIGN METHODOLOGY

Design Variables

Like other existing procedures, the design of concrete paver roads is based upon the evaluation of four primary factors and their interactive effect. They are: environment, traffic, subgrade soil and pavement materials. These design variables and their characterization are discussed below.

Environment

In the design methodology, like AASHTO, environmental effects are incorporated through the characterization of the subgrade soil and pavement materials. Subjective descriptions (see Table 1) of drainage quality and moisture conditions help determine design strength values for both subgrade soils and unbound granular materials. Also, if freeze-thaw action is a consideration, the subgrade support

value is reduced according to its frost susceptibility category. A more detailed discussion on these considerations is provided later in the paper.

Traffic

A key factor in the design of pavements is the anticipated traffic over its design life. In most design procedures, traffic related parameters such as vehicle mix, volumes, growth rate, directional split and lane distribution are used to arrive at a single value representation of traffic for direct input into the design procedure. Typically, traffic is represented in terms of the number of equivalent 18-kip (80 kN) single (highway standard) axle load repetitions or EALs.

For the design of a concrete paver road, the traffic mix analysis model is based upon the following equation (2):

$$2. \quad EAL_s = 365 * ADT * \frac{EAL_o}{100} * \frac{DS}{100} * \frac{LF}{100} * \frac{[(1 + \frac{i}{100})^n - 1]}{\frac{i}{100}} \quad (2)$$

where ADT = average daily traffic in both directions, EAL_o = number of EAL repetitions per 100 vehicles at the start of the design period; DS = directional split, in percent; LF = lane distribution factor, in percent; i = traffic growth rate, in percent; and, n = pavement design life, in years.

Specific traffic information may not be available in many situations. The road class and vehicle classification systems shown in Tables 2 and 3, were developed to overcome this situation. These are for use in conjunction with Equation 2. As noted in these tables, there are eight functional road classes and six vehicle groups defined in the analysis. In Table 2, typical average daily traffic and lane distribution factors are provided as a function of the road class. Vehicle distributions, vehicle damage factors and EAL_o for typical urban and rural roads are given in Table 3. Additionally, a 20-year design life, 4% traffic growth rate and 50% directional split is recommended in the absence of any other information.

The designer can therefore use the typical values derived for each variable from actual local, state, provincial or national traffic data (2, 5, 14). The designer can further specify the appropriate value for each traffic factor based on survey results, local experience, etc. The designer should also be cognizant of the variability associated with all pavement design factors, and hence, performance predictions (EALs to failure). In the design procedure, like AASHTO, this variability and the desired level of reliability are incorporated into the design process through a shift in the design traffic:

$$\text{Design EALs} = F_R * \text{EALs (from Eq. 2)} \quad (3)$$

where F_R = reliability design factor (greater than or equal to 1, depending on the reliability level). In turn, this factor is given by:

$$F_R = 10^{(z_T * s_o)} \quad (4)$$

where z_T = standard normal deviate (a function of the reliability level) and s_o = overall standard deviation.

For rigid pavements, the standard deviation ranges from $s_o = 0.3$ to 0.4 , while that of flexible pavements ranges from 0.4 to 0.5 . Based upon these values, a standard deviation of $s_o = 0.45$ was assumed for

interlocking concrete pavements. Typical F_R values are shown in Table 4 as function of the reliability level. Recommended reliability levels according to road class have been included in Table 2.

Note that while the F_R factor accounts for the variability of all performance related factors, it is only applied to traffic. Accordingly, average values should be used for all other design factors.

Subgrade Support

One of the most significant factors in the design of pavements is the evaluation of the subgrade soil strength. Many procedures for establishing this design factor are available: e.g., estimates made by the engineer based on experience; soil type to strength correlations; laboratory tests; in-situ evaluation methods such as dynamic deflection tests.

For the design of interlocking concrete pavements, alternate approaches based upon the USCS or AASHTO soil classification systems are provided for characterizing subgrade soils (5, 27). Both approaches make use of soil type to strength correlations for estimating subgrade strength in the absence of any other information.

For each soil classification system, typical resilient modulus (M_r) values have been assigned as a function of the soil type and are summarized in Tables 5 and 6, respectively. As shown, three modulus values are provided for each USCS or AASHTO soil type. These values are related to the environmental and drainage conditions discussed earlier (see Table 1). Guidelines for selecting the appropriate M_r value are summarized in Table 7.

Each soil type in Tables 5 and 6 has also been grouped into one of the five U.S. Army Corps of Engineers Frost Susceptible soil categories (5, 27). These categories with a brief description and reduced M_r values are presented in Table 8. The M_r values shown should only be used when frost action is a design consideration.

Pavement Materials - Structural Number and Layer Coefficients

The last set of design variables that must be established are related to the pavement structure. First, all paving materials available for construction must be identified. Next, the strength of each material must be established. Finally, all feasible material type and layer thickness combinations that provide sufficient structural capacity must be developed. Because the design procedure is based on the AASHTO method, the required load bearing capacity of the pavement is represented by an index number termed the structural number (SN). Analytically, the SN value is represented by the following equation:

$$SN = a_1 * t_1 + a_2 * t_2 + \dots + a_n * t_n = \sum a_i * t_i \quad (5)$$

where a_i = layer coefficient for material in the i^{th} layer, and t_i = thickness of the i^{th} layer. The layer coefficient (a_i), which expresses the relative ability of a material to function as a structural pavement component, is related to the type and properties of the material in question. Nomographs for selecting a_i as a function of the resilient (elastic) modulus or other material properties are provided in the AASHTO Guide. However, no such nomographs presently exist for concrete pavers. Consequently, a literature review was undertaken to gather information to characterize concrete pavers in terms of the layer coefficient.

Layer Coefficient - Concrete Pavers

Data reported in the literature (3 to 13, 15 to 26) indicates that the performance of interlocking concrete pavements is dependent on the interlocking of the individual units and, to a lesser degree, on the shape and thickness of the units. Paver shape has an effect its mechanical behavior; i.e., a uniform cross section will not crack as easily as those with variable cross sections. Unit thickness affects the mechanical behavior but, an increase in thickness also produces an increase in structural capacity. The

performance of the herringbone laying pattern is superior compared to the stretcher or basketweave patterns which tend to creep in the direction of traffic movement and adversely affect the interlocking of the pavers. And, as the thickness of the bedding sand layer is recommended to be between 25 - 40 mm after compaction.

The literature also details several approaches for establishing the strength and behavior of interlocking concrete pavements. Of these, two approaches have produced results which, when compared with field deflection measurements, show good agreement: finite element methods(4, 8, 9, 11, 17) and multi-layer elastic solutions (3, 4, 6, 8, to 11, 17 to 19). The model used in the first approach is one of rigid bodies (paver units) with springs for the jointing and bedding sand. In the latter approach, both pavers and sand are modeled as a composite layer.

Findings by Houben, et.al. (8, 9) show that while the finite element method produces a better fit of field conditions, its complexity is a major limitation. As a consequence, most existing design procedures rely on elastic solutions to characterize the strength and behavior of interlocking concrete pavements. A comprehensive summary of these procedures and the research efforts that led to their development is presented in Reference (24).

Because of its simplicity and general acceptance, the multi-layer elastic approach was also used in the development of the proposed paver design procedure; i.e., model concrete pavers and bedding sand materials as a composite layer. Modulus values for this layer, developed by researchers in several countries, are summarized in Table 9. While a wide range of values is reported, it is apparent that initial modulus values are significantly lower than those measured after many traffic repetitions, revealing a time/traffic dependence of the layer strength. This "progressive stiffening" affects performance and was incorporated into the design methodology.

Based on findings by the Australian Cement and Concrete Association (10), an initial composite modulus of 50,750 psi (350 MPa) was assumed. Also, a maximum composite modulus value of 450,000 psi (3100 MPa) was assumed to be reached, in a linear fashion, after 10,000 EALs. Using these moduli, layer coefficients were developed for the composite paver and sand layer based on the following AASHTO material characterization model:

$$a_{B/S} = 0.44 * \left(\frac{E_{B/S}}{450,000} \right)^{1/3} \quad (6)$$

where $a_{B/S}$ = layer coefficient of the composite layer and $E_{B/S}$ = modulus of the composite layer (in pounds per square inch).

Figure 1 illustrates the recommended relationship between the layer coefficient and traffic based on the modulus characterization presented herein. To determine the appropriate value, the contribution of both the reduced and full strength periods must be accounted for by use of a weighted layer coefficient as follows:

$$a_{B/S} = 0.44 - 0.09 * \frac{t_s}{t_d} \quad (7a)$$

for t_s (settling period) $\leq t_d$ (design Life), or

$$a_{B/S} = 0.26 + 0.09 * \frac{t_s}{t_d} \quad (7b)$$

for $t_s > t_d$; t_s is calculated from Equation 2; i.e., solve for number of years (n) to reach 10,000 EALs.

These models are applicable to all paver shapes but assume that a herringbone laying pattern will be used along with a 1 inch (25 mm) minimum thickness for the bedding sand layer. A minimum paver thickness of 80 mm is recommended for design EALs of 2,000,000 repetitions or less, 100 mm may be used for higher traffic levels. The 80 mm thick units may be used under loads exceeding 2,000,000 repetitions but a stiffer base will need to be used to compensate for this substitution. Also, because these models are based on a composite strength, the combined paver and bedding sand thicknesses must be used as input into Equation 5 to compute the pavement SN value.

Layer Coefficients - Other Pavement Materials

For other pavement materials, a_i correlations were derived from the AASHTO nomographs. Specifically, regression analyses between resilient modulus (or other material properties) and the layer coefficient were performed for each material type. The best fitting equation was found to be of the following logarithmic form:

$$A_i = K_1 + K_2 \cdot \log_{10}(\text{material strength}) \quad (8)$$

where K_1 and K_2 are regression constants dependent upon material type and strength parameter. K_1 , K_2 constants for each material type and strength parameter combination are summarized in Table 10. In the absence of material strength information, the default a_i values shown in Table 10 should be used. Also, recommended minimum layer thickness requirements are provided for each material type. If the design strength value, the predicted a_i value for unbound granular base and subbase materials should be corrected for drainage and moisture conditions:

$$a_i (\text{corrected}) = m_i * a_i (\text{uncorrected}) \quad (9)$$

The m_i values recommended for use in the design procedure are summarized in Table 11.

Serviceability

The initial serviceability (p_o) represents the serviceability value of a pavement immediately after construction. Because sufficient data is not presently available to establish this value for interlocking concrete pavements, a p_o value of 4.0 is recommended. Alternatively, the terminal serviceability represents the lowest serviceability value that will be tolerated before major rehabilitation of the pavement. For concrete pavers the recommended p_t value is 2.5 for all road classes.

Design Curves

Using Equation 1 and the variable definition procedures presented in this paper, a set of structural thickness design curves were developed for use with interlocking concrete pavements. Figures 2, 3 and 4 represent the base thickness design curves for unbound granular, asphalt-treated and cement-treated materials, respectively. These thickness values are seen to be a function of the subgrade strength and design traffic repetitions (expressed in EALs).

Use of these curves for the design of interlocking concrete pavements entails the following steps:

- o Establish moisture and drainage conditions; use Table 1.
- o Compute design EAL repetitions; use known or recommended (Tables 2, 3 and 4) traffic volume values for input into Equations 2 and 3.
- o Characterize subgrade strength; in the absence of any other information, use Tables 5 and 6 or 7 or, if frost is a consideration, use Table 8.
- o Determine base thickness requirement; use subgrade M_R and design EALs as input into Equations 2, 3 or 4, depending on material in question.

- o Characterize paving materials in terms of the AASHTO layer coefficient; if material properties are known, use a_i correlations presented in Table 10, otherwise use recommended default values.
- o Correct base thickness requirement for a_i values other than the recommended default value:

$$t' = t * \frac{a(\text{actual})}{a(\text{default})} \quad (10)$$

where t' = corrected base thickness; t = base thickness from Figure 4, 5 or 6; $a(\text{actual})$ = layer coefficient derived from known material property; and, $a(\text{default})$ = default layer coefficient = 0.14, 0.30 and 0.20 for unbound granular, asphalt-treated and cement-treated materials, respectively.

Equation 10 can also be used to develop subbase thicknesses, as illustrated in the example problem. Note however, that final layer thicknesses should not be less than the allowable value (see Table 10).

EXAMPLE PROBLEM

Problem Statement

An two-lane urban, commercial street is to be designed using concrete pavers. Laboratory tests on the subgrade soil indicate that the pavement is to be constructed on a sandy silt; i.e. ML soil type according to the USCS classification system. From available climatic data, coupled with the subgrade soil type, it is anticipated that the pavement will be exposed to moisture levels approaching saturation more than 25% of the time, drainage quality will be fair, and frost is a design consideration. Detailed traffic data are not available.

Using the above information, complete interlocking concrete pavement designs are to be developed for the following base and subbase paving materials:

- o Unbound granular or asphalt-treated base layer; modulus of 45,000 and 350,000 psi, (310 and 2410 MPa) respectively.
- o Unbound granular subbase; modulus of 14,000 psi (95 MPa).

All designs are to include a base layer but not necessarily the granular subbase layer.

Solution and Results

Step 1: Establish moisture and drainage conditions. As stated earlier, the pavement will be exposed to moisture levels approaching saturation conditions more than 25% of the time and the quality of drainage is fair.

Step 2: Compute design EAL repetitions. Since detailed traffic information was not available, the values recommended in Table 2, 3 and 4 were used: ADT = 2,000; $EAL_o = 3.841$; DS = 50%; LF = 100%; $i = 4\%$; $n = 20$ years; and, $F_R = 2.010$. Input of these values into Equations 2 and 3 yield a design traffic of 839,089 EALs.

Step 3: Characterize subgrade soil. Since only its USCS soil classification is known, Tables 5 and 7 were used to establish the design strength value. For a USCS ML soil and the given moisture and drainage conditions, the recommended subgrade modulus value is $M_R = 7,500$ psi (52 MPa). Because frost action is a consideration, the appropriate (reduced) design strength value is $M_R = 4,500$ psi (31 MPa).

Step 4: Determine base thickness requirements. Input of the design traffic (839,089 EALs) and subgrade strength ($M_R = 4,500$ psi/31 MPa) values into Figures 2 and 3 yields base thickness requirements of 10.5 and 5.25 inches (265 and 130 mm) for the unbound aggregate and asphalt-treated materials, respectively.

Step 5: Determine AASHTO layer coefficients. Using the known material moduli as input into the a_i correlations presented in Table 10, the following layer coefficients were determined: 0.44 for the composite concrete paver and sand layer; 0.14 for the unbound granular base; 0.30 for the asphalt-treated base; and, 0.08 for the unbound granular base. Note that the a_i value for both the unbound granular base and subbase materials has been adjusted for moisture and drainage conditions; i.e., a multiplier factor of 0.8 (from Table 11) was used.

Step 6: Calculate corrected base thickness requirements. Since both granular and asphalt-treated base materials under consideration have layer coefficients equal to those used in the development of the design curves (i.e., Figures 2 through 4), no corrections were necessary. The final granular and asphalt-treated base thicknesses are 10.5 and 5.25 inches (265 and 130 mm), respectively.

As indicated earlier, these thicknesses can also be used to develop subbase thicknesses. Using Equation 10 and an a_i value of 0.08 for the granular subbase, the equivalent thickness required is approximately 19 inches (480 mm). Since all designs must include a base layer, only that thickness exceeding the minimum allowable value (4 inches/100 mm for granular bases and 3 inches/75mm for asphalt-treated bases) was converted into subbase quality material.

The final paver alternative cross sections are summarized in Figure 5. Because traffic does not exceed 2,000,000 EALs, 80 mm thick units and a 25 mm bedding sand layer are recommended (and reflected in the base/subbase thicknesses). Also, the alternatives shown are but a small subset of the possible material type-layer thickness combinations, which satisfy the design considerations and constraints. Cost-effectiveness analyses of these and other pavement cross section alternatives should be conducted in order to select the optimal design.

SUMMARY

The 1986 AASHTO pavement design methodology was selected as the basis for developing a design procedure for the structural design of interlocking concrete pavements. In order to extend its use to pavers, a strength model to characterize the concrete pavers and bedding sand layer was developed based on findings reported in the literature. Also, multiple input options for the key pavement performance factors were developed in order to allow for various levels of engineering analysis.

A set of structural thickness design curves was also developed. These design curves provide the required granular, asphalt-treated or cement-treated base thickness as a function of the design subgrade strength and traffic repetitions. The use of these curves and the proposed design procedure were demonstrated through an example. The design procedure is incorporated into a computer software program, called Pavechek, available from the Concrete Paver Institute.

REFERENCES

- (1) AASHTO Guide For Design Of Pavement Structures (1986). American Association of State Highway and Transportation Officials, Washington, D.C.
- (2) Asphalt Overlays For Highway And Street Rehabilitation, Manual Series No. 17. (1983). The Asphalt Institute, College Park, Maryland.
- (3) Armitage, R. J. (1988). "Concrete block pavement evaluation with the falling weight deflectometer." Proc., Third International Conference on Concrete Block Paving, Rome, 203-208.
- (4) Clifford, J. M. (1988). "Some considerations which affect the modeling of segmental block pavements for industrial applications." Proc., Third International Conference on Concrete Block Paving, Rome, 170-177.
- (5) Concrete Block Pavements - Structural Design. NCMA-Tek 115. National Concrete Masonry Association, Herndon, Virginia.
- (6) Dutruel, F. and Dardare, J. (1984). "Contribution to the study of structural behaviour of a concrete block pavement." Proc., Second International Conference on Concrete Block Paving, The Netherlands, 29-39.
- (7) Eisenmann, J. and Leykauf, G. (1988). "Design of concrete block pavements in FRG." Proc., Third International Conference on Concrete Block Paving, Rome, 149-155.
- (8) Houben, L. J. M., et. al. (1988). "The Dutch design method for concrete block road pavements." Proc., Third International Conference on Concrete Block Paving, Rome, 156-170.
- (9) Houben, L. J. M., Molenaar, A. A. A., Fuchs, G. H. A. M. and Moll, H. O. (1984). "Analysis & design of CPB's." Proc., Second International Conference on Concrete Block Paving, The Netherlands, 86-99.
- (10) Interlocking Concrete Road Pavements (1986). Cement and Concrete Association of Australia, Brisbane.
- (11) Kasahara, A. and Matsuno, S. (1988). "Estimation of apparent elastic modulus of concrete block layer." Proc., Third International Conference on Concrete Block Paving, Rome, 142-148.
- (12) Kellersmann, G. H., Nonneman, D. J., Beuving, E. and Molenaar, A. A. A. (1988). "Site Investigation of Amsterdam concrete block pavements." Proc., Third International Conference on Concrete Block Paving, Rome, 121-129.
- (13) Knapton, J. (1988). "Pavement rehabilitation using concrete blocks." Proc., Third International Conference on Concrete Block Paving, Rome, 209-216.
- (14) Kubala, J., Lalani, N., O'Connell, R. and Petersen, C. (1986). "Vehicle classes for pavement design and capacity analysis." Journal of Transportation Engineering, ASCE, 112(6).
- (15) Lekso, S. (1980). "The use of concrete block pavements for highways." Proc., First International Conference on Concrete Block Paving, U.K., 1980, 101-103.
- (16) Livneh, M., Ishai, I., Nesichi, S. (1988). "Development of a pavement design methodology for concrete block pavements in Israel." Proc., Third International Conference on Concrete Block Paving, Rome, 94-101.

- (17) Miura, Y., Takaura, M., and Tsuda, T. (1984). "Structural design of concrete block pavements CBR method and its evaluation." Proc., Second International Conference on Concrete Block Paving, The Netherlands, 152-157.
- (18) Rollings, R.S. (1984). "Corps of Engineers design method for concrete block pavements." Proc. Second International Conference on Concrete Block Paving, Delft, 147-151.
- (19) Seddon, P. A. (1982). "The Behaviour Of Concrete Block Paving Under Repetitive Loading". Proc. First International Conference on Concrete Block Paving, U.K., 1980, pp.
- (20) Shackel, B. (1988). "The evolution and application of mechanistic design procedures for concrete block pavements." Proc., Third International Conference on Concrete Block Paving, Rome, 114-120.
- (21) Shackel, B. (1980). "A study of the performance of block paving under traffic using a heavy vehicle simulator." Proc., 10th ARRB Conference 10(2), 19-30.
- (22) Shackel, B. (1980). "An experimental investigation of the roles of the bedding and jointing sands in the performance of interlocking concrete block pavements subjected to traffic." Concrete Beton Nr 19 1980 09, pp 5-15.
- (23) Shackel, B. (1982). "The design of interlocking concrete block pavements for road traffic." Proc., First International Conference on Concrete Block Paving, U.K.
- (24) Shackel, B. (1980). "Progress in the evaluation and design of interlocking concrete block pavements." Concrete Masonry Association of Australia, Brisbane.
- (25) Sharp, K. G. and Armstrong, P. J. (1984). "Testing of concrete block pavements by the Australian Road Research Board." Proc., Second International Conference on Concrete Block Paving, The Netherlands, 40-49.
- (26) Sharp, K. G. and Armstrong, P. J. (1985). "Interlocking Concrete Block Pavements." Special Report No. 31, Australian Road Research Board.
- (27) Yoder, E.J. and Witczak, M.W. (1975). Principles of Pavement Design. Second Edition, John Wiley and Sons, Inc., New York, N.Y.

TABLE 1
SUBJECTIVE DESCRIPTION OF MOISTURE AND DRAINAGE CONDITIONS (1)

Parameter	Description	Available Options
Moisture	Percent of time that pavement is exposed to moisture levels approaching saturation	<input type="radio"/> less than 1 % <input type="radio"/> 1 to 5 % <input type="radio"/> 5 to 25 % <input type="radio"/> greater than 25 %
Drainage	Quality of drainage (time too remove water)	<input type="radio"/> Excellent (2 hrs) <input type="radio"/> good (1 day) <input type="radio"/> fair (1 week) <input type="radio"/> poor (1 month) <input type="radio"/> very poor (water will not drain)

TABLE 2
ROAD CLASSIFICATION SYSTEM (2, 5, 14)

Road Class	Average Daily Traffic*	Lane Distribution Factor** (%)	Recommended Reliability Level (%)
Arterial or Major Streets			
Urban	40,000	90	90
Rural	15,000	90	85
Major Collectors			
Urban	15,000	90	85
Rural	6,000	90	80
Minor Collectors			
Urban	6,000	100	80
Rural	2,000	100	80
Commercial/Multi-Family Locals			
Urban	2,000	100	75
Rural	1,000	100	75

* in both directions

** use 100% for 1 or 2 lanes in both directions; 90% for 3 or 4 lanes; and, 80% for more than 4 lanes.

TABLE 3
VEHICLE CLASSIFICATION SYSTEM (2, 5, 14, 27)

Vehicle Type	Urban Roads			Rural Roads		
	Distribution (%)	Damage Factor	EAL *Reps.	Distribution (%)	Damage Factor	EAL *Reps.
Passenger Vehicles	77.0	0.0004	0.031	70.0	0.0004	0.028
Recreation Vehicles	0.5	0.09	0.045	1.5	0.06	0.090
Pickups	14.0	0.01	0.140	18.5	0.01	0.185
Single Unit Trucks	6.0	0.25	1.500	5.5	0.20	1.100
Buses	0.5	0.25	0.125	1.0	0.20	0.200
Tractor-Trail2er 2Combinations	2.0	1.00	2.000	3.5	0.95	3.325
Number of EALs/100 vehicles:			3.841			4.928

* Damage Factor = Number of EALs/vehicle pass

TABLE 4
RELIABILITY DESIGN FACTOR, F_R (1, 27)

Reliability Level (%)	F_R
50	1.000
60	1.300
70	1.721
75	2.010
80	2.390
85	2.929
90	3.775
95	5.499
99	8.527

TABLE 5
SUBGRADE STRENGTH AS A FUNCTION OF USCS SOIL TYPE (5, 27)

USCS Soil Group	Option 1	Option 2	Option 3	Frost
	M _r (ksi)	M _r (ksi)	M _r (ksi)	Suscep. Group
GW, GP	20	20	20	NFS
GW-GM, GW-GC,	20	20	20	F1
GP-GM, GP-GC	20	20	20	F1
GM, GM-GC, GC	20	20	20	F3
SW, SP	20	20	20	NFS
SW-SM, SW-SC	20	20	20	F2
SP-SM	20	20	20	F2
SP-SC	17.5	20	20	F2
SM, SM-SC	20	20	20	F4
SC	15	20	20	F3
ML, ML-CL	7.5	15	20	F4
CL	7.5	15	20	F3
MH	6	9	12	F4
CH	4.5	6	7.5	F3

Note: refer to Table 7 for selection of appropriate option

TABLE 6
SUBGRADE STRENGTH AS A FUNCTION OF AASHTO SOIL TYPE (5, 27)

AASHTO Soil Group	Option 1	Option 2	Option 3	Frost
	M _r (ksi)	M _r (ksi)	M _r (ksi)	Suscep. Group
A-1-a	20	20	20	NFS
A-1-b	20	20	20	F1
A-2-4, A-2-5	20	20	20	F4
A-2-6	7.5	15	20	F3
A-2-7	20	20	20	F3
A-3	15	20	20	F2
A-4	7.5	15	20	F4
A-5	4.5	6	9	F4
A-6	4.5	10.5	20	F3
A-7-5	4.5	6	7.5	F3
A-7-6	7.5	15	20	F3

Note: refer to Table 7 for selection of appropriate option

TABLE 7
ENVIRONMENT AND DRAINAGE OPTIONS
FOR SUBGRADE CHARACTERIZATION (1)

Quality of Drainage	Strength Option Percent of Time Pavement is Exposed to Moisture Levels Approaching Saturation			
	< 1%	1 to 5%	5 to 25%	> 25%
Excellent	3	3	3	2
Good	3	3	2	2
Fair	3	2	2	1
Poor	2	2	1	1
Very Poor	2	1	1	1

TABLE 8
FROST SUSCEPTIBLE SOIL CATEGORIES (5, 27)

Frost Suscept. Group	Description	M _r (psi)
NFS	Non-frost susceptible soils (less than 2% passing .02 mm sieve); no problem.	Not applicable
F1	Gravelly soils (3 to 20% passing 0.02 mm sieve); slight problem.	12,000
F2	Sands (3 to 15% passing .02 mm sieve); slight to medium problem.	9,000
F3	Gravelly soils (greater than 20% passing .02 mm sieve); sandy soils except silty sands (greater than 20% passing .02 mm sieve); plastic clays (PI > 12); varved clays (with uniform condition); medium to high problem.	4,500
F4	Silts, including sandy silts and fine silty sands (greater than 15% passing .02 mm sieve); lean clays (PI < 12); varved clays (with non-uniform conditions); highest problem.	4,500

TABLE 9
SUMMARY OF LAYER MODULI FOR COMPOSITE PAVER AND SAND LAYER

Country	Modulus, psi MPa	Reference
United Kingdom	130,500/900	(3)
	290,000/2000	
Japan	243,900/1680	(17)
	627,850/4330	
New Zealand	60,175/415	(19)
Australia	50,750/350*	(10)
	464,000/3200	
Netherlands	92,655/640	(9)
	402,085/2770	
United States (U.S.A.C.E.)	600,000/4160	(18)

* Initial modulus value

TABLE 10
STRUCTURAL LAYER COEFFICIENT CORRELATIONS
 $a_1 = K_1 + K_2 * \log_{10} (\text{material strength})$

Material	Strength Parameter (Units)	Recommended Regression Constants		Maximum Default Allowable		Minimum Allowable Thickness, in.
		K1	K2	a ₁ Value*	a ₁ Value	
Asphalt Treated Base/Subbas (psi)	Modulus	-1.453	0.316	0.30	0.40	3.0
	Marshall Stability (lb)	-0.323	0.187			
Cement Treated Base/Subbase (psi)	Modulus	-2.651	0.486	0.22	0.30	4.0
	Unconfined Compressive Strength (psi)	-0.395	0.212			
Unbound Granular Base (psi)	Modulus	-0.976	0.249	0.14***	0.25	4.0 or 6.0***
	CBR (%)	-0.053	0.098			
Unbound Granular Subbase	R-value	-0.514	0.338	0.11**	0.20	4.0 or 6.0***
	Modulus	-0.839	0.227			
	CBR (%)	0.012	0.065			
	R-value	-0.205	0.176			


for use in the absence of material strength information

* use 4.0" if EALs < 500,000 repetitions; 6.0" if EALs > 500,000 repetitions

** must be corrected for moisture and drainage conditions, unless reflected in design strength value used

TABLE 11
DRAINAGE COEFFICIENT FOR GRANULAR MATERIALS (1)

Quality of Drainage	Drainage Coefficient			
	Percent of Time Pavement is Exposed to Moisture Levels Approaching Saturation			
	< 1%	1 to 5%	5 to 25%	> 25%
Excellent	1.4	1.3	1.3	1.2
Good	1.3	1.2	1.1	1.0
Fair	1.2	1.1	0.9	0.8
Poor	1.1	0.9	0.7	0.6
Very Poor	1.0	0.9	0.6	0.4

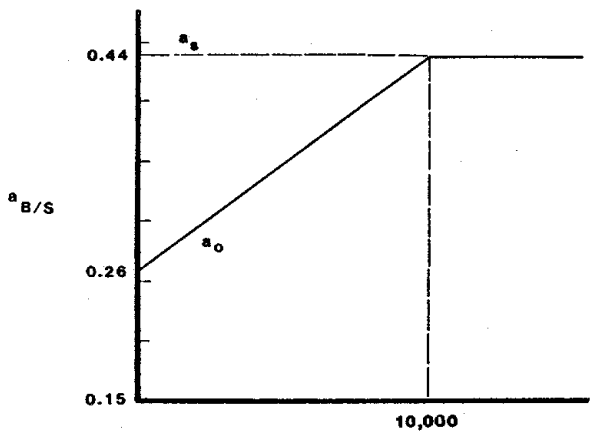

EAL, 18 KSAL

Figure 1
Layer Coefficient-Traffic Relation for Composite Block and Sand Layer
(Note: 18 KSAL = 80 kN Single Axle Load)

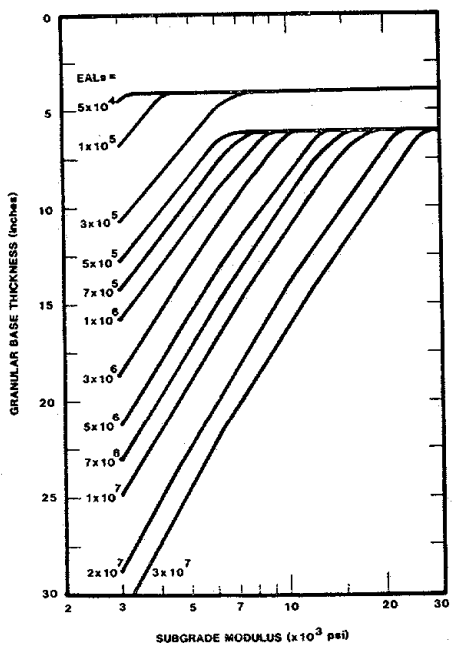


Figure 2
Thickness Design Curves
Granular Base
(Note: 1000 psi = approximately 7 MPa)

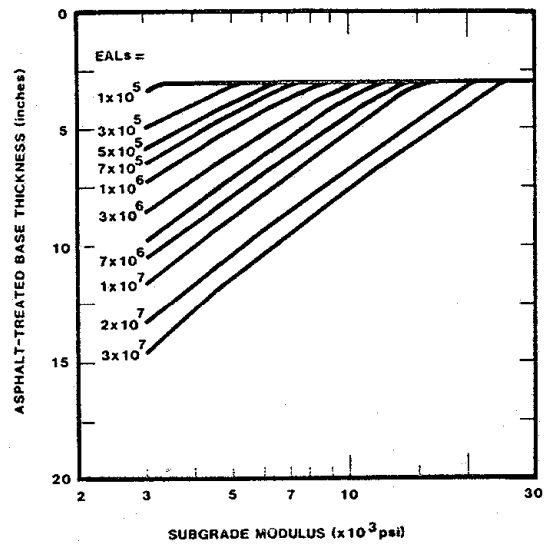


Figure 3
Thickness Design Curves
Asphalt-treated Base
(Note: 1000 psi = approximately 7 MPa)

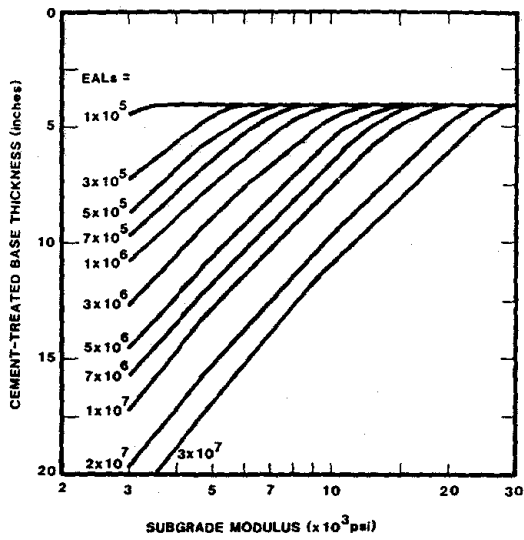


Figure 4
 Thickness Design Curves
 Cement-treated Base
 (Note: 1000 psi = approximately 7 MPa)

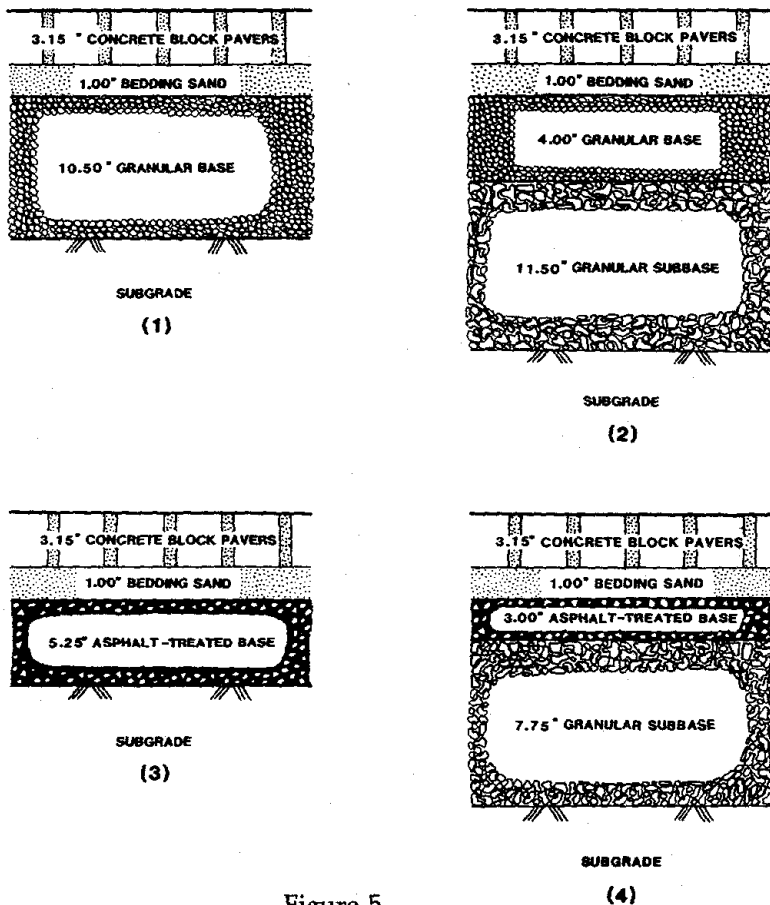


Figure 5
 Alternative CBP Cross Sections for Example Problem
 (1" = 25.4 mm)